

Packaging for your life.



PIONEER
a member of LINHARDT Group



ALUMINIUM TUBES

VERSIONS



STANDARD ORIFICE



MEMBRANE




PLASTIC THREAD RING



PLASTIC INSERT




PLASTIC INSERT PLUG



STANDUP CAP



OPHTHALMIC NOZZLE



PLASTIC EXTENDED NOZZLE



OPHTHALMIC CAP



FEZ STYLE



STANDUP PEDESTAL
PUNCTURE TOP



REVERSE TYPE FEZ CAP




FEZ STYLE PUNCTURE TOP



THREE PIECE OPHTHALMIC
PIERCING CAP

Please contact us for information about the right combination options.

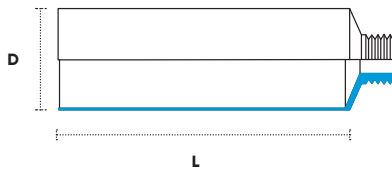

DIAMETER D	BODY LENGTH L	THREAD DIAMETER (IN MM)							EXTENDED NOZZLE OPHTHALMIC	CLOSED END NOZZLE MEMBRANE	PLASTIC THREAD RING	PLASTIC INSERT ONSET	FILLING CAPACITY*
		58	68	82	97	104	115	141					
11.00	80	x	x						x	x			1-3 gm
12.70	80	x	x						x	x			2-5 gm
13.50	85	x	x						x	x			3-5 gm
16.00	105	x	x	x	x				x	x	x	x	7.5-12 gm
19.00	125			x	x				x	x	x	x	15-20 gm
22.00	140	x		x	x				x	x	x	x	20-30 gm
25.00	170	x		x	x	x	x		x	x	x	x	30-40 gm
25.40	170	x		x	x	x	x		x	x	x	x	30-40 gm
27.00	170				x	x	x	x	x	x	x	x	35-50 gm
28.00	170				x	x	x	x	x	x	x	x	60-100 gm
30.00	180				x	x	x	x	x	x	x	x	70-100 gm
31.75	180				x	x	x	x	x	x	x	x	70-100 gm
35.00	185				x	x	x	x	x	x	x		80-120 gm
38.00	185				x	x	x	x	x	x	x	x	100-130 gm
40.00	185				x	x	x	x	x	x	x		100-140 gm

*Double fold, gm-max.

Offset printing with up to 6 colours.

Tubes of various dimensions can be supplied along with the following attributes:

- Plain extruded
- Externally coated in white or colour, transparent or opaque
- Internally plain or lacquered
- Sealing end lining (latex lining) to enhance sealing and arrest leakages after crimping
- Shoulder coated and wax coated

Tolerance as per IS:1301 / IS:7182 / IS:7852.